

DATA SHEET

TN9/6/3

Ferrite ring cores (toroids)

Product specification
Supersedes data of 1997 Nov 21
File under Ferrite Ceramics, MA01

2000 Apr 20

Ferrite ring cores (toroids)

TN9/6/3

RING CORES (TOROIDS)

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(I/A)$	core factor (C1)	5.17	mm ⁻¹
V_e	effective volume	102	mm ³
l_e	effective length	22.9	mm
A_e	effective area	4.44	mm ²
m	mass of core	≈0.5	g


Coating

The cores are coated with polyamide 11 (PA11), flame retardant in accordance with "UL 94V-2"; UL file number E 45228 (M).

Isolation voltage

DC isolation voltage: 1000 V.

Contacts are applied on the edge of the ring core, which is also the critical point for the winding operation.

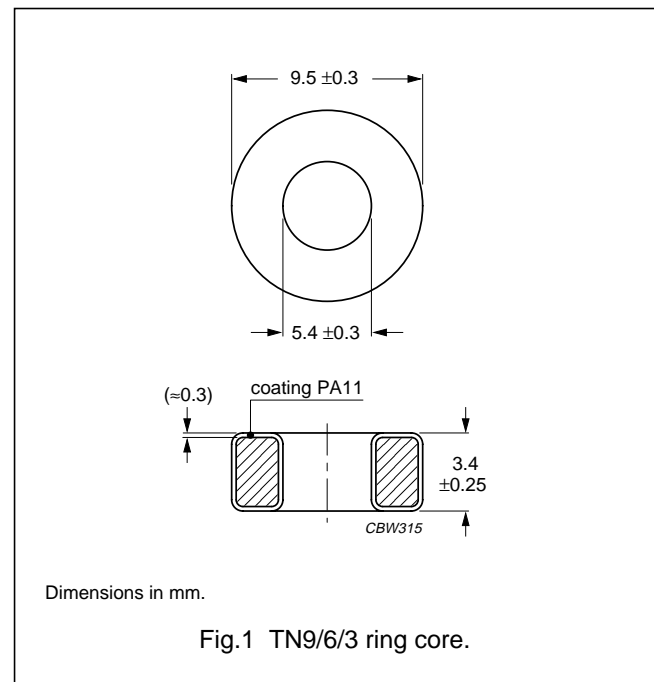

Ring core data

GRADE	A_L (nH)	μ_i	COLOUR CODE	TYPE NUMBER
4C65	30 ±25%	≈125	violet	TN9/6/3-4C65
4A11	170 ±25%	≈700	pink	TN9/6/3-4A11
3R1 ⁽¹⁾	–	≈800	black	TN9/6/3-3R1
3F3	440 ±25%	≈1800	blue	TN9/6/3-3F3
3C90 <small>des</small>	560 ±25%	≈2300	ultramarine	TN9/6/3-3C90
3E25	1340 ±30%	≈5500	orange	TN9/6/3-3E25
3E5 ⁽²⁾	2070 ±30%	≈8500	yellow/white	TL9/6/3-3E5
3E6 ⁽³⁾ <small>des</small>	2435 ±30%	≈10000	–	TC9/6/3-3E6

Notes

- Due to the rectangular BH-loop of 3R1, inductance values strongly depend on the magnetic state of the ring core and measuring conditions. Therefore no A_L value is specified. For the application in magnetic amplifiers A_L is not a critical parameter.
- Ring cores in 3E5 are lacquered (polyurethane) and have different dimensions:
Outside diameter = 9.3 ± 0.4 mm; inside diameter = 5.75 ± 0.3 mm; height = 3.25 ± 0.3 mm; flame retardant in accordance with "UL 94V-2"; UL file number E 192048.
- Ring cores in 3E6 are coated with parylene C and have different dimensions:
Outside diameter = 9.0 ± 0.2 mm; inside diameter = 6.0 ± 0.2 mm; height = 3.0 ± 0.15 mm.

WARNING

Do not use 3R1 cores close to their mechanical resonant frequency. For more information refer to "3R1" material specification in this data handbook.


Ferrite ring cores (toroids)

TN9/6/3

Tag plate

General data

PARAMETER	SPECIFICATION
Tag plate material	liquid crystal polymer (LCP), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E83005 (M)
Solder pad material	copper-tin alloy (CuSn), tin-lead alloy (SnPb) plated
Maximum operating temperature	155 °C, "IEC 60085", class F
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B: 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s

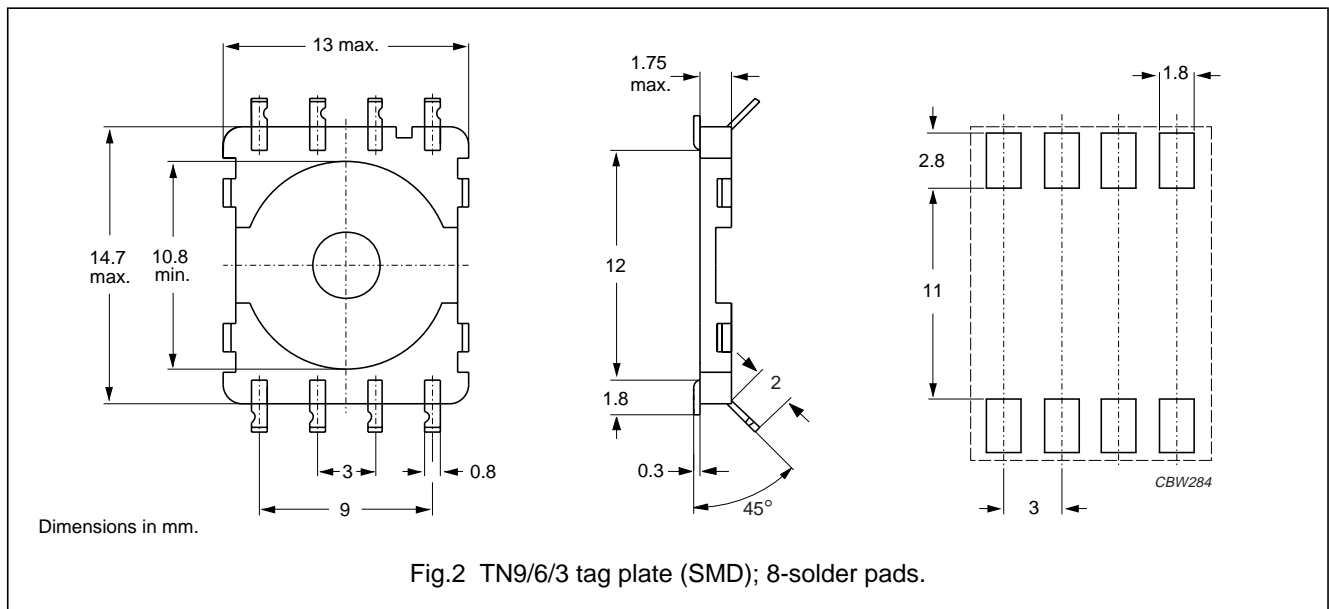


Type number information for TN9/6/3 tag plate (SMD) with 8 solder pads

NUMBER OF SOLDER PADS	TYPE NUMBER
8	TGPS9

Cover data

PARAMETER	SPECIFICATION
Cover material	polyamide (PA4.6) glass reinforced, flame retardant in accordance with "UL 94V-0"
Maximum operating temperature	130 °C, "IEC 60085" class B
Type number	COV9

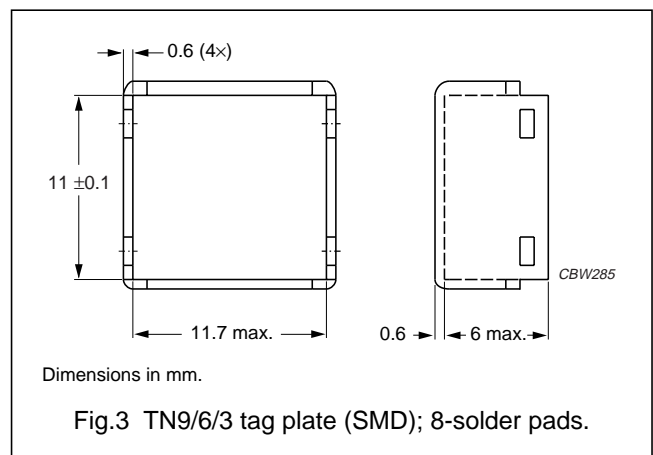

Ferrite ring cores (toroids)

TN9/6/3




DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Philips Components reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Components reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Components customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Components for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.