


FAST RECOVERY RECTIFIER DIODES

FEATURES

- HIGH VOLTAGE CAPABILITY
- FAST AND SOFT RECOVERY
- INSULATED PACKAGE :
insulating voltage = 2000V_{DC}
capacitance = 12 pF

DESCRIPTION

Single chip rectifier suited for power conversion and polarity protection applications. This device is packaged in TO220AC and in ISOWATT220AC.

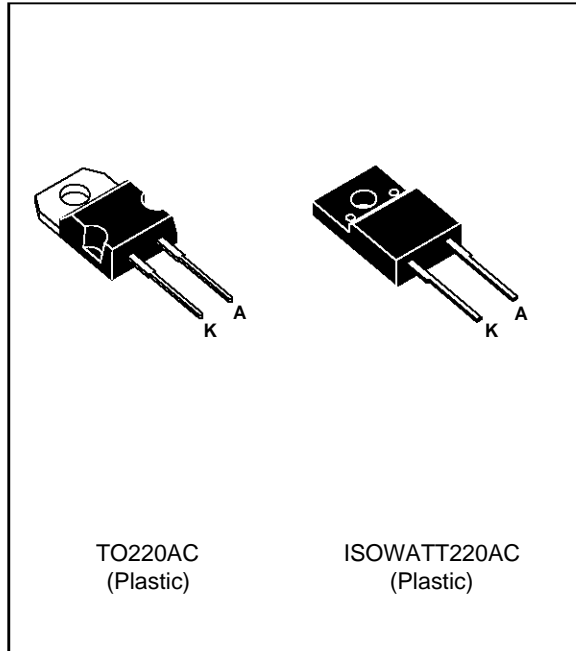

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter			Value	Unit
I _{F(RMS)}	RMS on-state current			12	A
I _{F(AV)}	Average forward current $\delta = 0.5$	TO220AC	T _c =130°C	6	A
		ISOWATT220AC	T _c =105°C	6	
I _{FSM}	Surge non repetitive forward current		tp=10ms sinusoidal	90	A
T _{stg} T _j	Storage and junction temperature range			- 65 to + 150 - 65 to + 150	°C °C

Symbol	Parameter	BYT71- (F)					Unit
		100	200	400	600	800	
V _{RRM}	Repetitive peak off-state voltage	100	200	400	600	800	V

BYT71(F)-800

THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
Rth (j-c)	Junction to case	TO220AC	2.3	°C/W
		ISOWATT220AC	4.9	

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
I _R **	T _j = 25°C	V _R = V _{RRM}			20	μA
	T _j = 100°C				1	mA
V _F *	T _j = 100°C	I _F = 6 A			1.3	V
	T _j = 25°C	I _F = 6 A			1.4	

Pulse test : * t_p = 380 μs, duty cycle < 2 %

** t_p = 5 ms, duty cycle < 2 %

RECOVERY CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
t _{rr}	T _j = 25°C	I _F = 1A V _R = 30V dI _F /dt = -15A/μs			300	ns

To evaluate the conduction losses use the following equations :

$$P = 1.15 \times I_F(AV) + 0.025 \times I_F^2(RMS)$$

Fig.1 : Average forward power dissipation versus average forward current.

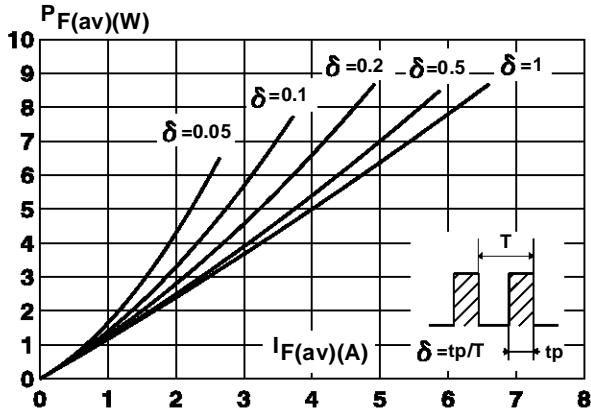


Fig.2 : Peak current versus form factor.

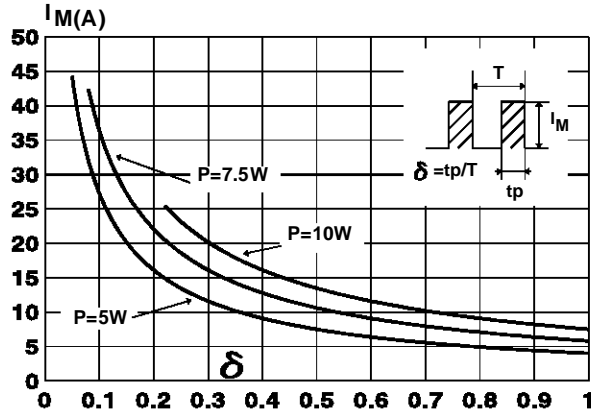


Fig.3 : Forward voltage drop versus forward current (maximum values).

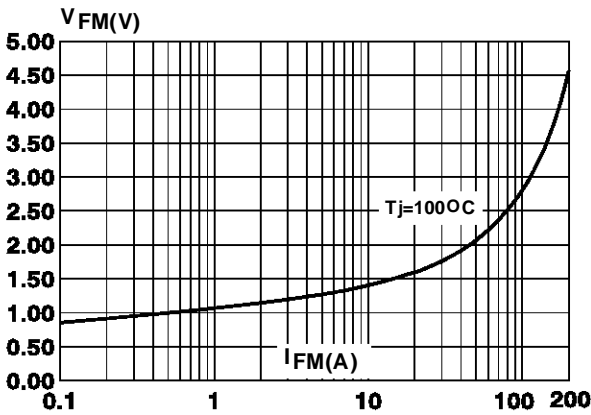


Fig.4 : Relative variation of thermal impedance junction to case versus pulse duration. (TO 220 AC)


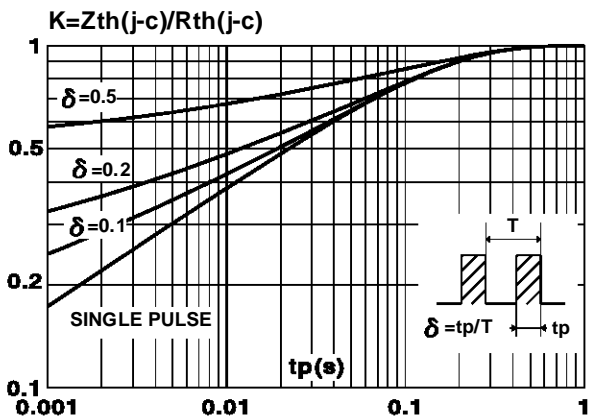


Fig.5 : Relative variation of thermal impedance junction to case versus pulse duration. (ISOWATT220AC)

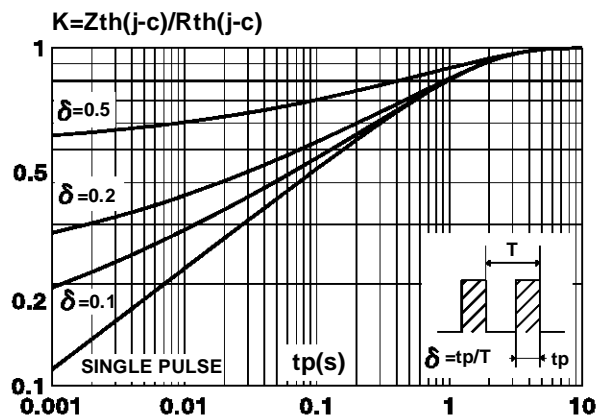

BYT71(F)-800

Fig.6 : Non repetitive surge peak forward current versus overload duration.
(TO 220 AB)

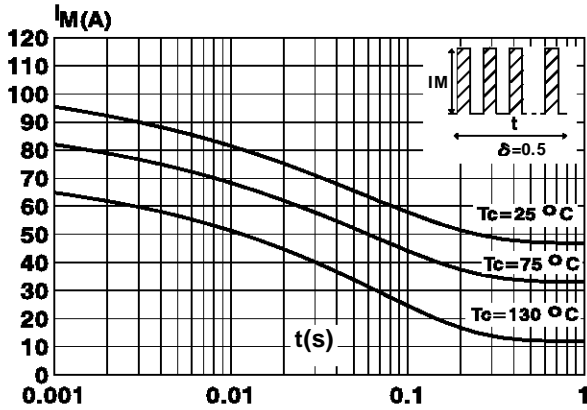


Fig.7 : Non repetitive surge peak forward current versus overload duration.
(ISOWATT220AB)

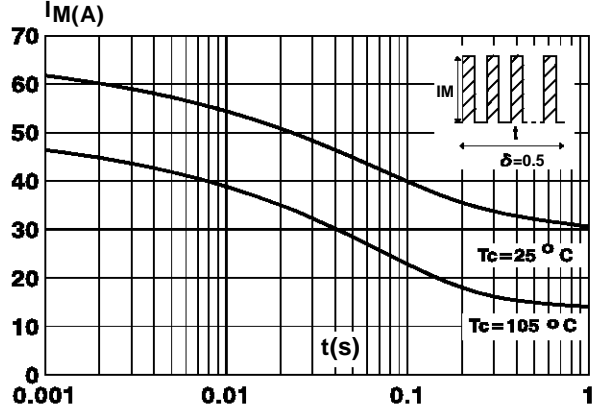


Fig.8 : Average current versus ambient temperature.
(duty cycle : 0.5) (TO 220 AB)

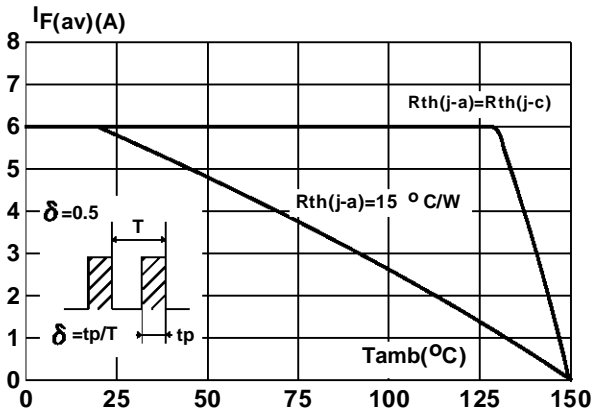


Fig.9 : Average current versus ambient temperature.
(duty cycle : 0.5) (ISOWATT220AB)

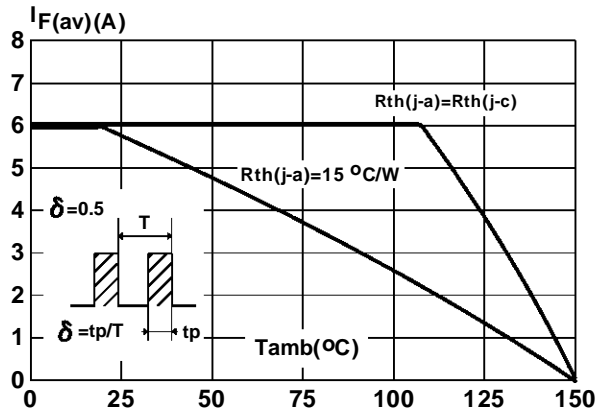


Fig.10 : Junction capacitance versus reverse voltage applied (Typical values).

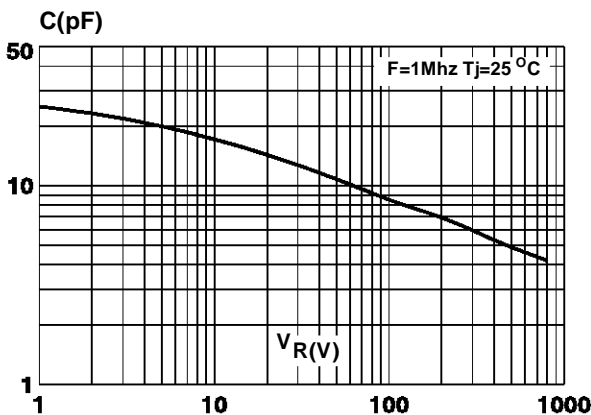


Fig.11 : Recovery charges versus diF/dt.

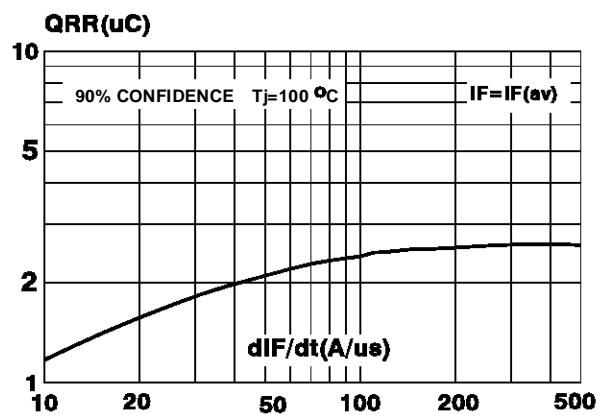


Fig.12 : Peak reverse current versus dIF/dt.

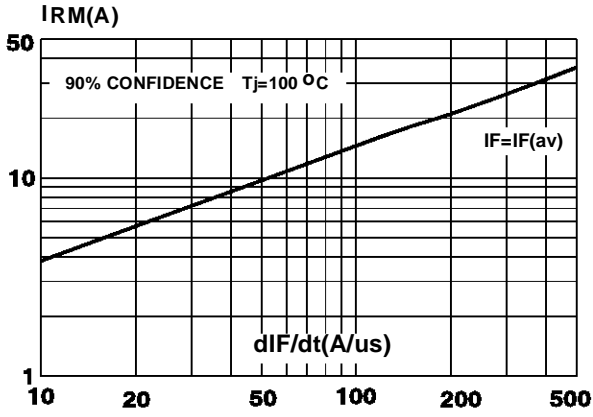


Fig.14 : Peak forward voltage versus dIF/dt.

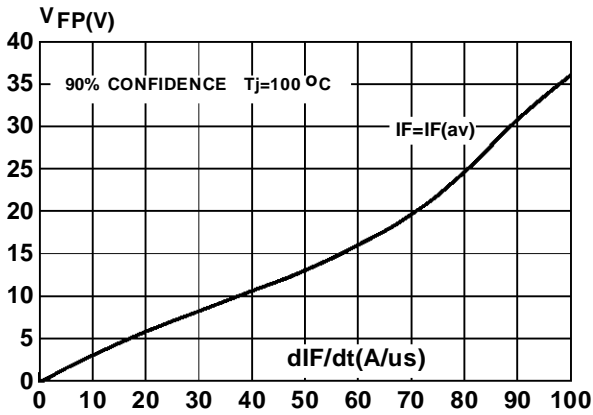


Fig.13 : Dynamic parameters versus junction temperature.


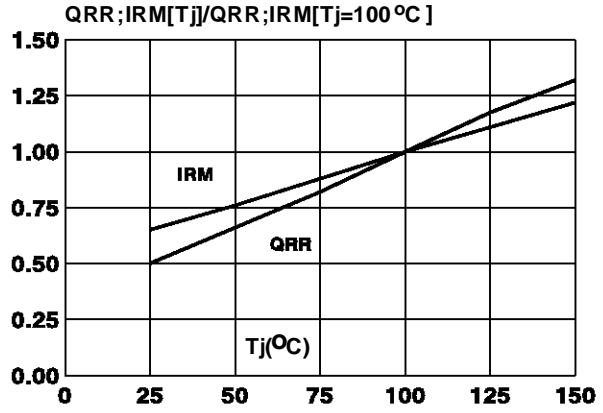



Fig.15 : Recovery time versus dIF/dt.

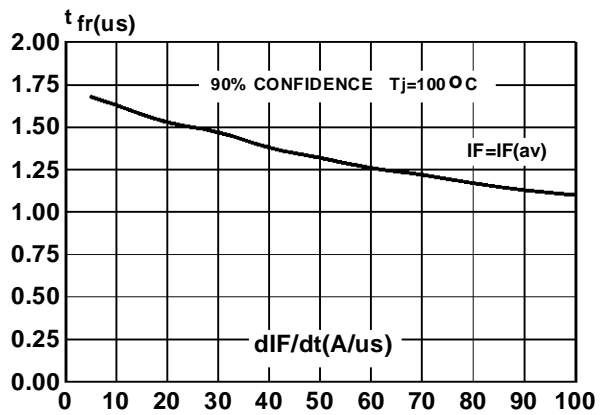

BYT71(F)-800

PACKAGE MECHANICAL DATA

TO220 AC Plastic

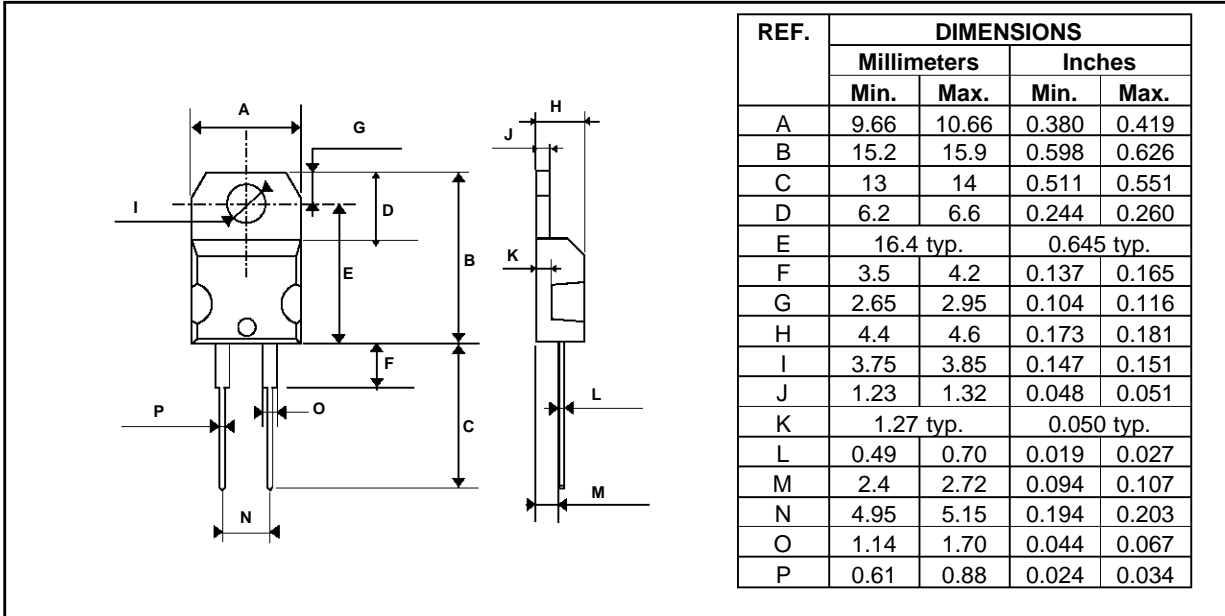

Cooling method : C

Marking : Type number


Weight : 1.9 g

Recommended torque value : 0.55m.N

Maximum torque value : 0.70m.N

PACKAGE MECHANICAL DATA

ISOWATT220AC Plastic

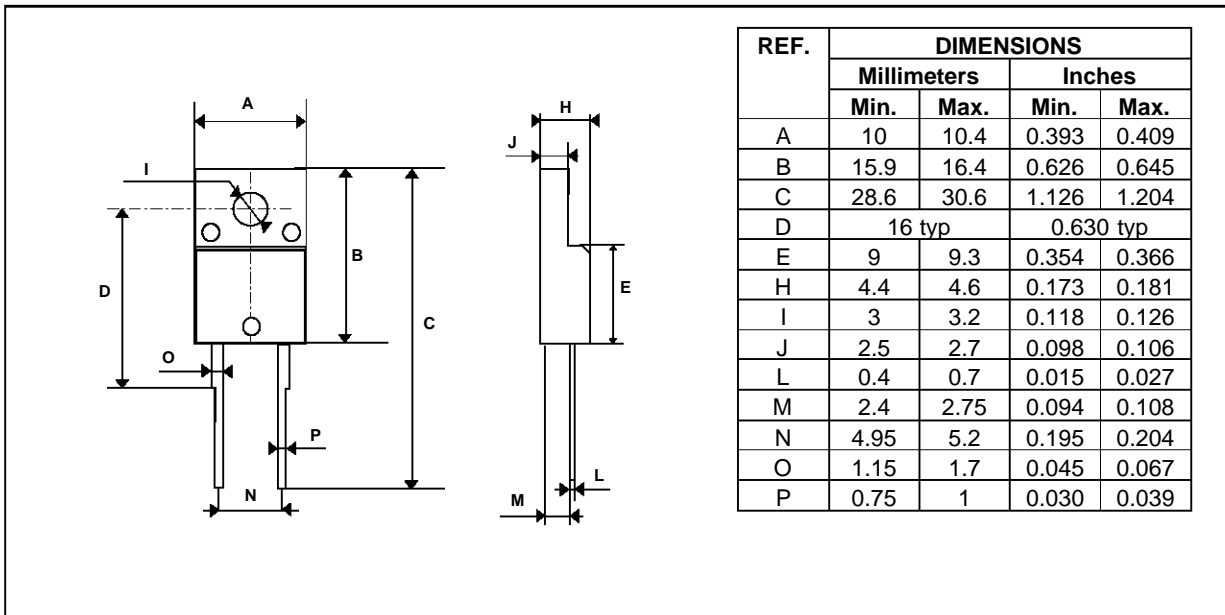

Cooling method : C

Marking : Type number

Weight : 2 g

Recommended torque value : 0.55m.N

Maximum torque value : 0.70m.N

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

Purchase of I²C Components by SGS-THOMSON Microelectronics, conveys a licence under the Philips I²C Patent. Rights to use these components in an I²C system, is granted provided that the system conforms to the I²C Standard Specification as defined by Philips.

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A